




## 2N<sup>®</sup> IP HANDSET BASIC ANSWERING UNIT

The 2N<sup>®</sup> IP Handset is our most affordable answering unit. It's a basic audio device for communication with visitors and opening the door. Offer the 2N<sup>®</sup> IP Handset for projects where you don't expect to use My2N services, such as bulk administration and remote configuration.

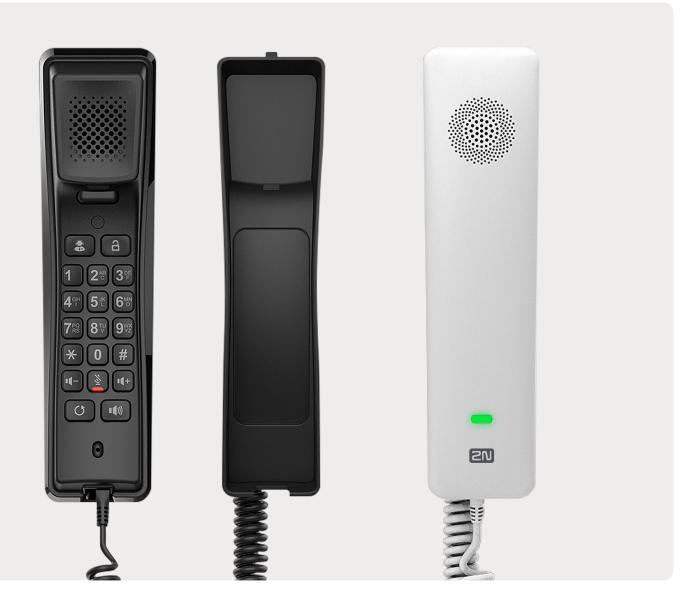

- Basic IP answering unit
- Button to open the door
- Desktop or wall mount
- PoE

## VARIANTS







**2N® IP HANDSET, WHITE** 1120101W

## TECHNICAL PARAMETERS

GENERIC		VLAN	802.1P/Q
Mounting	surface or desktop	QoS	RFC3611, RFC6035
SIP Lines	2	Network access control	802.1x
Voice quality	HD		
Power supply	PoE, optional external power supply	DEPLOYMENT & MANAGEMENT	
Call modes	handset/hands-free	Configuration	web-based
		Accounts	admin/guest user levels
PHONE FUNCTIONS Supported functions	direct IP dial, calling via PBX, call logs (in/out/missed, records accessible via the web), dial plan, multicast	Auto-provisioning	via FTP/TFTP/HTTP/HTTPS/DHCP OPT66/ SIP PNP/TR-069
		PHYSICAL SPECIFICA	TIONS
CALL FUNCTIONS		Phone color	white/black
Supported functions	call out/answer, mute/unmute, hands-free/handset, speed dial, redial, auto-answering, 3-way conference, customized ring, main/secondary SIP servers	Power supply	PoE or 5 V/2 A
		Power consumption	up to 3.5 W
		Working temperature	0-45°C
AUDIO		Working humidity	10-90%
Narrowband codec	G.711a/u, G.726, G.729A, iLBC	Dimensions	55.8 x 215 x 57.8 mm
Wideband codec	G.722, Opus	Status indicators	green/red LED
DTMF	In-band, Out-of-band DTMF-relay(RFC2833)/SIP INFO	Connector	RJ45 for network connection
Advanced features:	Acoustic Echo Canceller (AEC), Packet Loss Concealment (PLC), Voice Activity Detection (VAD), Comfort Noise Generation (CNG), Background Noise Estimation (BNE), Noise Reduction (NR)	KEYPAD	
		Number of keys	19
		DSS key 1	quick dial/concierge call button
		DSS key 2	door opening button
NETWORK		12 standard phone	speed dial configuration available via the web
LAN	10/100 Mbps ethernet	digit keys	speed dial configuration available vid the web
IP mode	IPv4/IPv6/IPv4&IPv6	2 function keys	hands-free, redial
IP configuration	static/DHCP/PPPoE	3 volume control keys	up/down/mute (with red color LED)
VPN	L2TP/OpenVPN	WARRANTY	5-years warranty see https://www.2n.com/ en_GB/support/warranty-and-repairs