



# USER GUIDE

FOR RA708 SERIE  
CB TELEPHONE

## GENERAL

*The RA708 type weatherproof telephone from DAC Limited is designed to provide a reliable communications terminal for many arduous communications applications.*

***This telephone has been designed for use with certain types of Central Battery manual exchanges.***

The telephone can be connected as an extension, on certain types of PBX [see details under 'line connections'] or via a standard BT telephone socket, where the CB feature has been enabled.

## MOUNTING OPTIONS



### **Wall Mounting**

Use reducing washers [supplied as part of installation kit] to affix to wall through telephone backplate.



### **Top of Pole Mounting**

Top of pole mounting bracket available from DAC Limited



### **Pole or Post Mounting**

Use pole mounting adaptor bracket [supplied as part of installation kit] and band at required height on pole

# LINE CONNECTION


The number of telephones that can be connected to a direct exchange line PBX is limited to the ringer equivalence number [REN] of all the telephones connected, which should not exceed a total value of 4. The REN value of this telephone is 1. In case of doubt please contact your telephone supplier.

***The following information is provided for use by your approved telephone installer or network supplier.***

## Terminal Connections

B - Line [B]

A - Line [A]

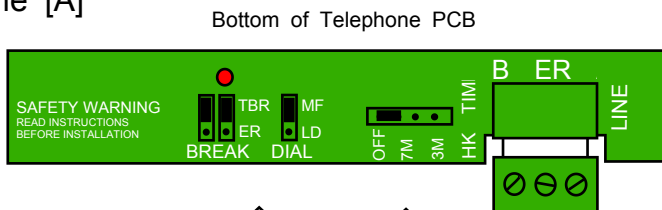

**Dialling & Recall mode.**  
Default - MF & TBR




**Off-Hook Timer options**  
Default - OFF



## Earth Bonding

The earth bonding point is on the rear of the telephone.

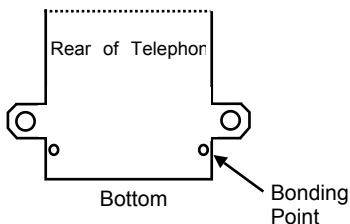

**Available options:**

- 1 Armoured Cord Handset
- 2 Padlock Hole in door
- 3 Latching Door
- 4 Telephone logo
- 5 Installation kit
- 6 Top of pole mounting kit
- 7 Yellow or Grey colour

**Distributor:**

DAC Limited, Unit 214a Lomeshaye Business Village, Turner Roa  
Nelson, Lancashire. UK. BB9 7DR

Tel: +44 (0) 1282 447000 Fax: +44 (0) 845 280 1915

[www.daclimited.co.uk](http://www.daclimited.co.uk)