




## USER GUIDE

### CONNECTION DIAGRAM

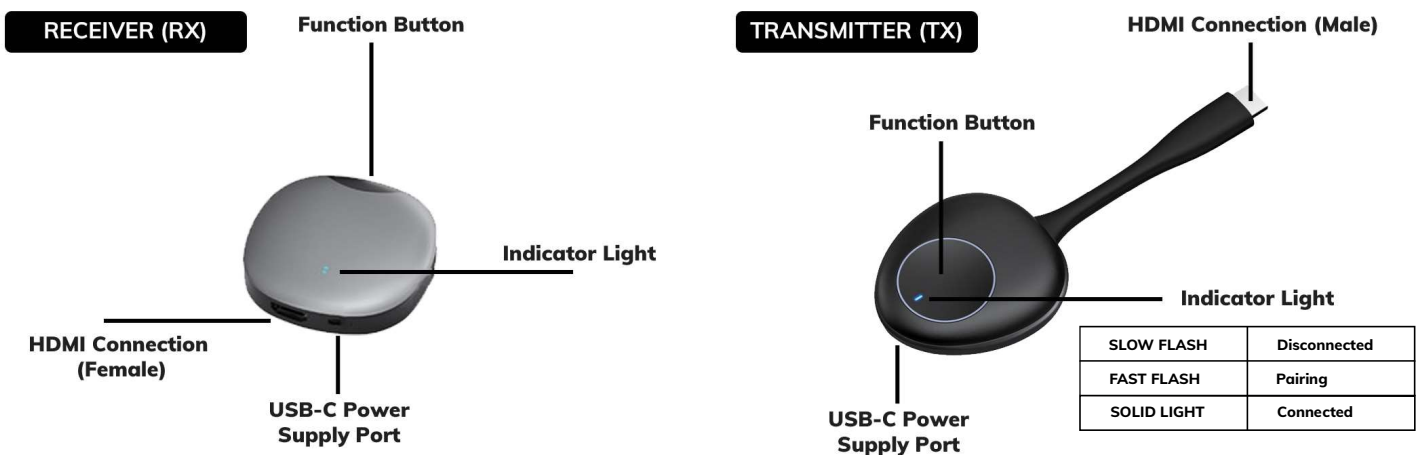

1. Connect the HD port of the receiver to the video input port of the display device such as the monitor or TV.
2. Connect the USB-C power supply port of the receiver to the charging cable and plug it into the power adapter (Voltage above 5V, current above 2A). Turn on the Receiver power switch.
3. Adjust the HD Signal source of the monitor or TV to the corresponding HD port until the boot screen is displayed
4. Connect the transmitter to the computer or other devices With HD video output function. After the indicator Light enters the fast flash state, Wait for ten seconds to complete Casting

\*Please make sure that the power of the computer is sufficient If the power supply of the computer is insufficient or HD is unable to supply power, please connect the transmitter to the power adapter or USB-C power supply port (Voltage above 5V, current above 2A)

## PAIRING

The Receiver and Transmitter have been paired together, so they should work out of the box. However, if you lose the pairing or need to pair a new transmitter, just follow the pairing instructions below.

## PAIRING INSTRUCTIONS

1. Please Press the receiver function button for more than 3 seconds, and the prompt will pop up on the interface: Release the button to pair With Ezcast TX. Wait for the transmitter to enter pairing mode.
2. Press the transmitter function button for more than 5 seconds, the Indicator will flash for pairing, and Wait for the transmitter indicator to be always on, indicating that the connection is successful.

With one receiver and multiple transmitters, 1 receiver can pair with 8 transmitters for switching.

## FUNCTION SETTINGS

### Function Settings

1. Search for receiver in Wireless Network

(Name is RX-XXXX, default password is 12345678)

2. Open the mobile / tablet browser and enter 192.168.203.1 in the address bar
3. After entering the website, you can operate the distribution network

## TROUBLE SHOOTING

Q: How to restore factory settings?

A: When the product fails, press and hold the receiver function button for 10 seconds. After a black screen appears and restart, the factory settings will be restored.

Q: Can devices without HD interface be used?

A: Yes, please use the device with an HD interface converter

