

Jabra[®]
YOU'RE ON

JABRA EVOLVE 80



User Manual

jabra.com/evolve80

A BRAND BY

GN Netcom

© 2014 GN Netcom A/S / GN Netcom US, Inc. All rights reserved. Jabra® is a registered trademark of GN Netcom A/S. All other trademarks included herein are the property of their respective owners. The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by GN Netcom A/S is under license.

Made in China

MODEL: HSC019

FCC ID: BCE-HSC019

IC: 2386C-HSC019



REACH-GNM-
HSC019



Declaration of Conformity can be found on
www.jabra.com/CP/US/declarations-of-conformity

| | |
|--|----|
| 1. WELCOME..... | 5 |
| 2. JABRA EVOLVE 80 OVERVIEW..... | 6 |
| 2.1 INCLUDED ACCESSORIES | |
| 2.2 OPTIONAL ACCESSORIES | |
| 3. HOW TO WEAR..... | 9 |
| 3.1 LEFT AND RIGHT | |
| 3.2 MICROPHONE POSITION | |
| 3.3 FOLD-FLAT STORAGE | |
| 4. HOW TO CHARGE THE BATTERY..... | 12 |
| 4.1 CHARGE USING THE CONTROLLER | |
| 4.2 CHARGE USING USB CABLE | |
| 5. HOW TO CONNECT..... | 14 |
| 5.1 CONNECT TO PC (WITH CONTROLLER) | |
| 5.2 CONNECT TO MOBILE DEVICE (WITHOUT CONTROLLER) | |
| 6. HOW TO USE | 16 |
| 6.1 CALLS | |
| 6.2 MULTIPLE CALL HANDLING | |
| 6.3 BUSYLIGHT | |
| 6.4 ACTIVE NOISE CANCELLATION (ANC) | |
| 6.5 LISTEN-IN | |
| 6.6 TRANSFER CALL FROM PC TO MOBILE DEVICE | |

| | |
|-----------------------------------|----|
| 7. SUPPORT | 23 |
| 7.1 FAQ | |
| 7.2 HOW TO CARE FOR YOUR HEADSET | |
| 8. TECHNICAL SPECIFICATIONS | 24 |


1. WELCOME

Thank you for using the Jabra Evolve 80. We hope you will enjoy it!


JABRA EVOLVE 80 FEATURES

- Active Noise Cancellation (ANC)
- Rechargeable battery powering the ANC for up to 24 hours
- Automatic charging through the Jabra EVOLVE LINK controller
- Listen in function
- Busylight on headset and the Jabra EVOLVE LINK controller
- Discreet microphone boom-arm that integrates into the headband when not on calls
- Automatic mute when microphone boom-arm is docked in the headband
- Connects to multiple devices (smartphone or tablet) with 3.5mm jack (plug & play)
- Superior music and voice capabilities
- Hi-fi Sound

2. JABRA EVOLVE 80 OVERVIEW

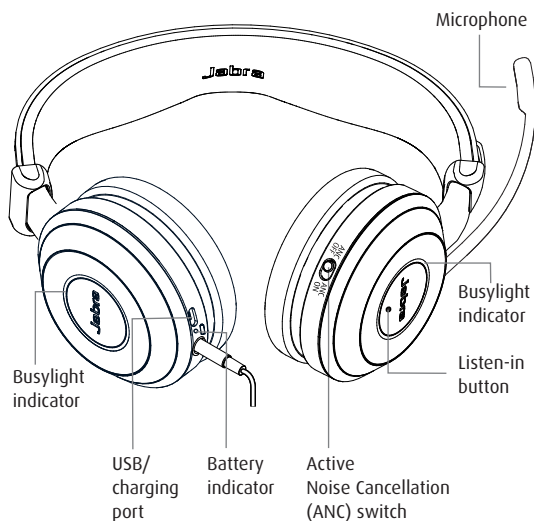

CONTROLLER (JABRA EVOLVE LINK)

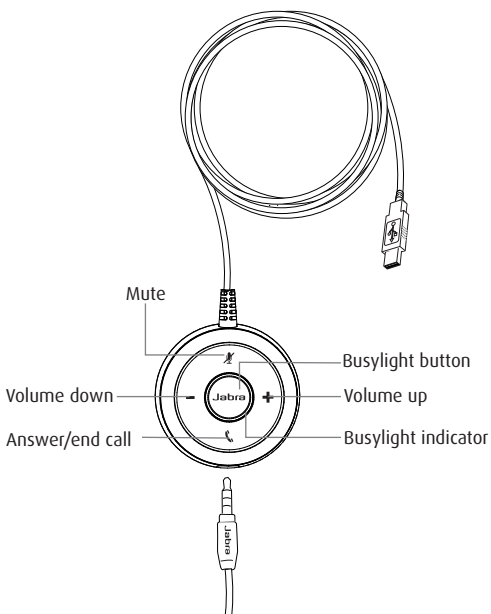

2.1 INCLUDED ACCESSORIES



Carry pouch



Cable
management clip

2.2 OPTIONAL ACCESSORIES



Jabra Evolve 80
headset




Controller
(Jabra Evolve Link)




Flight adapter

3. HOW TO WEAR




3.1 LEFT AND RIGHT

Left and right is marked inside each earcup.




3.2 MICROPHONE POSITION

It is recommended to position the microphone close to your mouth (2 cm). The microphone is bendable for personal preference.




When listening to music or outdoors, the microphone can be stored in the headband groove.

The microphone will be muted when the microphone is rotated up, and un-muted when rotated down.



3.3 FOLD-FLAT STORAGE

The earcups can be folded-flat for easy storage. The microphone must be removed from the headband groove and swiveled backwards before folding the earcups flat.

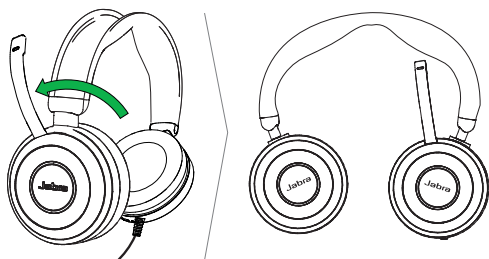


4. HOW TO CHARGE THE BATTERY

The in-built rechargeable battery powers the Active Noise Cancellation (ANC) and Listen-in functions. The headset can still be used for calls and music without the battery.

It takes approx. 3 hours to fully charge the battery.


4.1 CHARGE USING THE CONTROLLER

Normal use of the headset when connected to the controller will charge the battery.

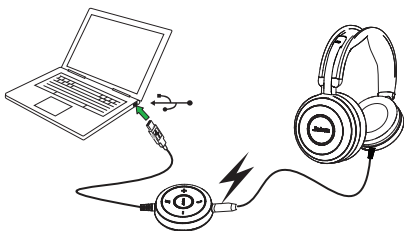


4.2 CHARGE USING USB CABLE

The headset battery will charge when connected to a USB cable. It is highly recommended to use a Jabra USB cable.

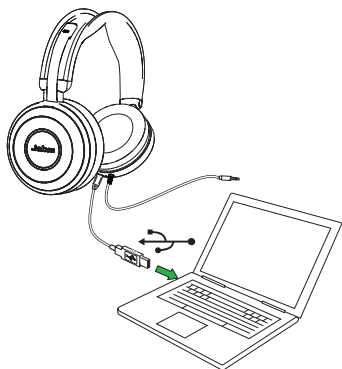


The headset will NOT charge when directly connected to the PC without a USB cable.

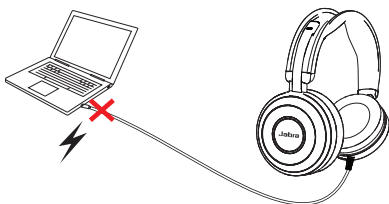

5. HOW TO CONNECT

5.1 CONNECT TO PC (WITH CONTROLLER)

Fully plug the headset into the controller, and connect the controller to a USB port on the PC.

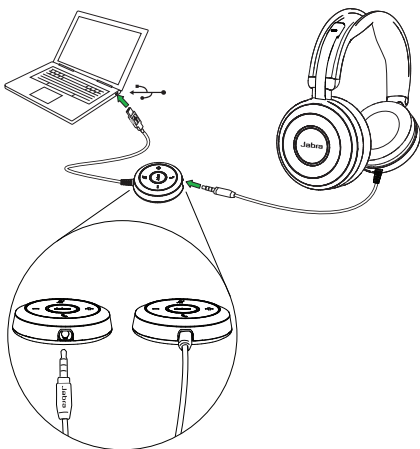


The headset jack **MUST** be fully inserted into the controller for the headset to work.

NOTE: When the headset is disconnected from the controller, any active call will be put on hold. To resume the call, reconnect the headset to the controller and manually resume the call on the PC (softphone).

5.2 CONNECT TO MOBILE DEVICE (WITHOUT CONTROLLER)



Plug the headset directly into your mobile device.

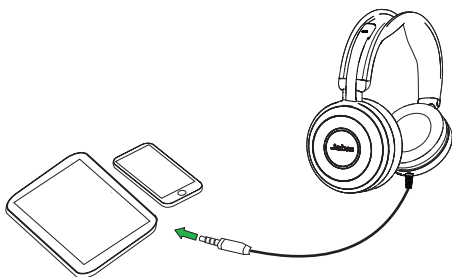





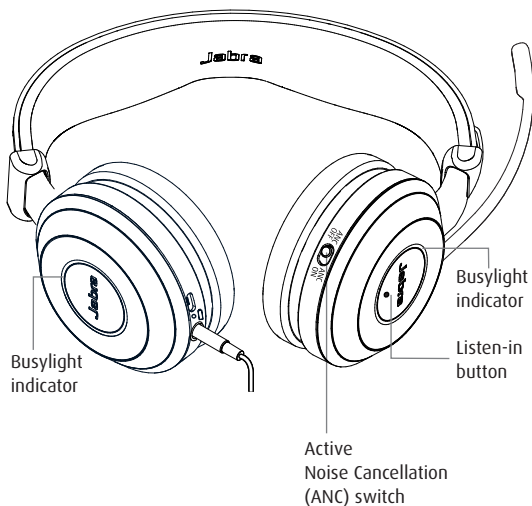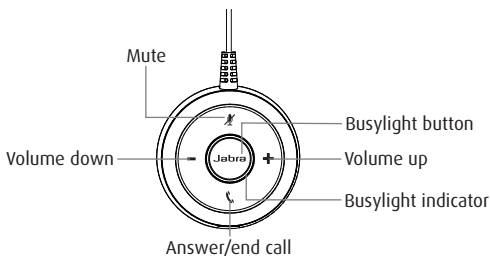


The headset battery will not charge when plugged directly into a mobile device.

NOTE: When plugged directly into a mobile device, the overall call quality (for you and the listener) will be lower than when connected to a PC/tablet using the controller (Jabra Evolve Link).

6. HOW TO USE




6.1 CALLS

| | FUNCTION | ACTION |
|---|--|--|
|  | Answer/end call | Tap the Answer/end button |
|  | Reject call | Double-tap the Answer/end button |
|  | Adjust volume | Tap the Volume up or Volume down button |
|  | Busylight on/off | Tap the Busylight button |
|  | Mute/unmute microphone | Tap the Mute button, or swivel the microphone up (mute) or down (un-mute) |
| | FUNCTION | ACTION |
|  | Active Noise Cancellation (ANC) on/off | Active Noise Cancellation reduces outside disturbance. Slide the Active Noise Cancellation switch to ANC ON/ANC OFF |
|  | Listen-in on/off | Listen-in lets outside sound into the headset. Tap the Listen-in button (ANC must be on) |

6.2 MULTIPLE CALL HANDLING


The headset can accept and handle multiple calls at the same time.

| | FUNCTION | ACTION |
|---|---|--|
| | End current call and answer incoming call | Tap the Answer/end button |
|  | Switch between held call and active call | Press and hold (2 secs) the Answer/end button |
| | Put current call on hold and answer incoming call | Press and hold (2 secs) the Answer/end button |
| | Reject incoming call, when on a call | Double-tap the Answer/end button |

6.3 BUSYLIGHT

The busylight indicators on the headset and controller let others know when you are busy, or on a call.

Tap the **Busylight** button on the controller to manually turn on/off the busylight indicator.

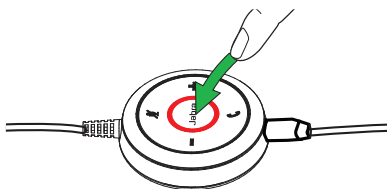

6.4 ACTIVE NOISE CANCELLATION (ANC)

The headset uses Active Noise Cancellation (ANC) to reduce outside disturbance to a minimum, allowing you to fully focus on your work or call. Additionally, sound quality is also boosted when ANC is switched on. ANC is powered by the in-built rechargeable battery. The battery will power ANC for up to 24 hours, when not connected to the controller.

Slide the **Active Noise Cancellation** switch to ANC ON/ANC OFF.



6.5 LISTEN-IN

Listen-in is a feature that enables you to hear your surroundings without having to remove the headset. Your music and calls will be muted (not paused), however your microphone will remain on. Listen-in is powered by the in-built rechargeable battery.

Tap the **Listen-in** button on the right earcup to activate/deactivate Listen-in.



The **Active Noise Cancellation** switch must be set to ANC ON to use Listen-in.

6.6 TRANSFER CALL FROM PC TO MOBILE DEVICE

It is possible to transfer an active call from your PC to mobile device and continue using the headset.

1. Transfer the call from PC to mobile device using your supported softphone.
2. Unplug the headset from the controller.
3. Plug the headset directly into your mobile device, and manually resume the call.



7. SUPPORT

7.1 FAQ

View the FAQs on [Jabra.com/evolve80](https://www.jabra.com/evolve80)

7.2 HOW TO CARE FOR YOUR HEADSET

- Always store the headset with the power off and safely protected.
- Avoid storage at extreme temperatures (above 25°C/77°F or below -20°C/4°F). This can shorten battery life and may adversely affect the headset.

8. TECHNICAL SPECIFICATIONS

| JABRA EVOLVE 80 HEADSET | SPECIFICATION |
|------------------------------|---|
| Headset weight: | 324 g |
| Controller weight: | 57 g |
| Headset dimensions: | 190 mm x 190 mm |
| Controller dimensions: | 55 mm x 55 mm |
| Microphones: | Noise cancelling microphone |
| Speaker: | 40mm Dynamic PureSound speakers (Hi-fi) |
| Speaker maximum input power: | 30 mW |
| Speaker frequency range: | 20 hz - 20 kHz |
| Cable length: | Controller to PC: 90 mm Headset to 3.5mm jack: 1.2 m |
| Noise reduction: | Up to 98% cancellation using Hybrid Active Noise Cancellation |
| ANC time: | Up to 24 hours |
| Operating temperature: | -10°C to 55°C (14°F to 131°F) |
| Storage temperature: | -20°C to 25°C (-4°F to 77°F) |

