



**PROJECT
TELECOM**
UNIFYING COMMUNICATIONS

Professional Binaural Active Noise Cancelling Wireless Bluetooth Headset



User Guide

Contents

1. Product Overview-----	2
2. Basic Operation -----	3
3. Bluetooth Pairing and Connection-----	4
4. Connection with Two devices-----	5
5. LED Indicator -----	6
6. Charging-----	6
7. Product Specification-----	8
8. Trouble Shooting -----	8

1.Product Overview



Package Contents:


- A. Professional Binaural Active Noise Cancelling Wireless Bluetooth Headset x 1
- B. Audio Cable x 1
- C. Micro USB Charging Cable x 1
- D. USB-A to USB-C Adapter x 1

2. Basic Operation

Button	Function	Operation
MFB	Power ON	Press the MFB button for 1-3 seconds to power ON.
	Power OFF	Press the MFB button for 5 seconds to power OFF.
	Enter into Pairing Mode	When the device is OFF, Press and hold MFB button for 5-8 seconds to enter into pairing mode. When device is in Standby double press the MFB button to enter into pairing mode.
	Play / Pause	Short press MFB button to play or pause music.
	Redial a call	Double press MFB to dial the last call.
	Reconnect	When there is a previous pairing record, power ON and turn your devices bluetooth ON to connect automatically or short press MFB to reconnect in pairing mode.
	Voice Dialing	Long press the MFB button for 1 second then release
	Audio Switch	Long press the MFB button for 1 second to switch the audio between the phone and Bluetooth headset.
	Answer a call	Press the MFB button to answer an incoming call
	Hang up a call	Press the MFB button to terminate a connected call
	Reject a call	Long press the MFB button for 1 second to reject
Volume +	Volume Up	Press the + Button to increase the volume
	Next Song	Press the + button for 1 second to play next song
Volume -	Volume Down	Press the - Button to increase the volume
	Previous Song	Press the - button for 1 second to play previous song


3. Bluetooth Pairing and Connection

- A.** When the headset is OFF, Press & Hold the MFB Button for 5-8 seconds to enter into pairing mode. The LED will flash Blue & Red
- B.** Search and click to connect “ E8” on your phone or devices Bluetooth list, The LED will flash Blue after it is connected, now you can use your headset with the paired device.
- C.** You can press MFB/ volume+ / volume- on the Bluetooth headset to control the answer/hang up a call and play/pause of the music, next and previous songs, volume up and down.

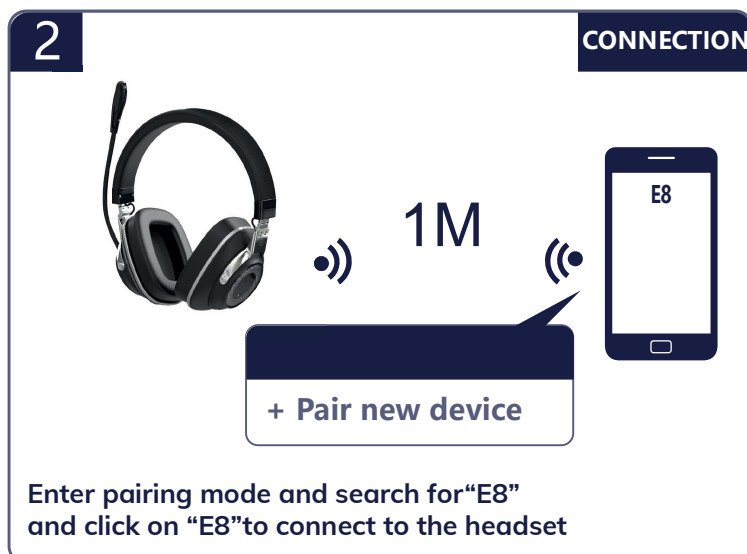

4. Connection with two phones

- A.** Follow Part 3 to connect with the first phone, then turn OFF the Bluetooth function on the first phone.
- B.** Double press the MFB button to enter pairing mode again, the Red & Blue LED will flash alternately.
- C.** Search and click to connect “E8” on your second phone. LED will change to a Blue slow flash after it is connected.
- D.** Turn back on the Bluetooth function on the first phone, click to reconnect “E8” on the Bluetooth devices list.
The Headset will be connected with both phones now.

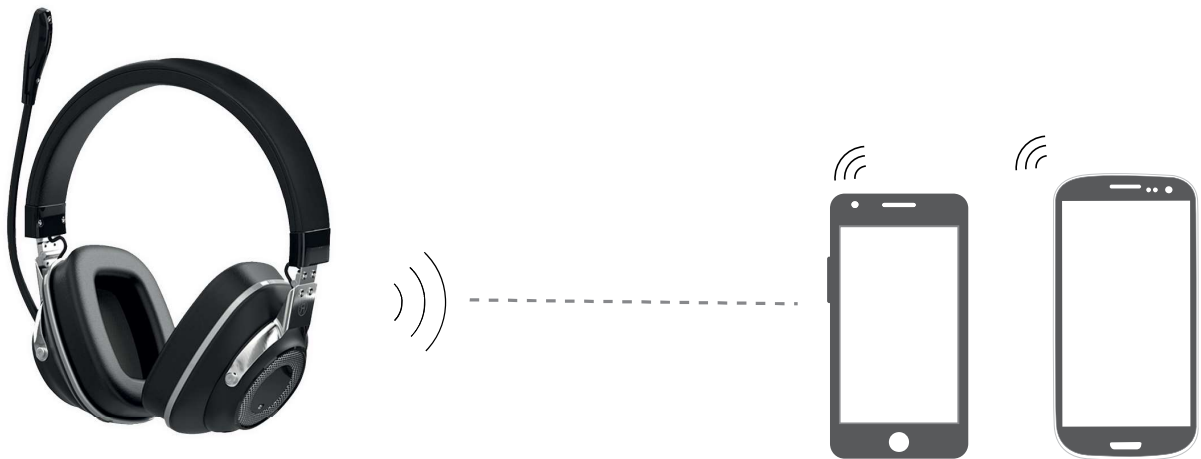

Notes:

When connected to two devices music or calls can only be played or taken on one device at a time. To change the device, pause or close the music of the previous phone. The same applies to phone calls.

5. LED Indicator

MODE	LED LIGHT
Power on	LED Blue flashes 1 second
Power off	LED Red flashes 1 second
Pairing mode	LED Red & Blue flashes alternately
Unconnected standby mode	LED Blue flashes once every 2 seconds
Connected standby mode	LED Blue flashes once every 5 seconds
Playing Music	LED Blue flashes once every 5 seconds.
Talking	LED Blue flashes once every 5 seconds
Delete paired record	Blue and Red LED flashes once at the same time
Charging	Solid LED Red
Full charged	Solid LED Blue
Low battery	Red LED flash

6. Charging

Charge the headset when the Red LED flashes.


Charging time is about 2 hours. The solid Red LED will change to Solid Blue when full charged.

Charge Connections

The charging base connects via Micro USB to USB-A (or USB-C if you use the adapter). The charger can be connected via any powered USB-A or USB-C Port. The base does not transfer data.

Charging the Headset without the base

You can charge the headset directly through the Micro USB port on the side of the headset via any powered USB-A or USB-C port using the cable and adapter provided.

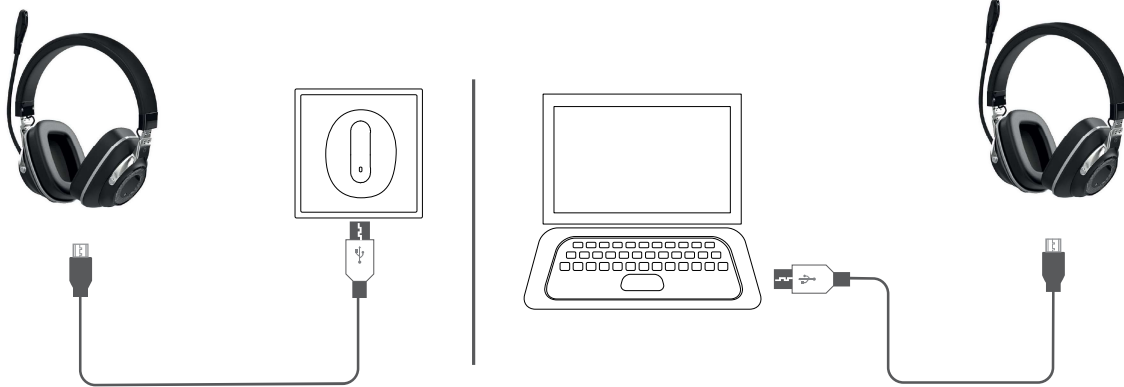

**Charging with a
USB Plug Charger**

**Charging with PC
via a USB Port**

Notes:

1. Charge the headset at least once every 2 months when you do not use it.

7. Product Specification

Bluetooth Version	Bluetooth V5.0
Bluetooth Chipset	CSR 8635
Operation Range	10M
Bluetooth Protocols	HFP v1.6, AVRCP v1.4, A2DP v1.2, DI v1.3, HSP v1.2
CODEC Code	SBC
Battery Capacity	300maH/3.7V
Charging Time	2H
Stand-by Time	200H
Working Time	About 17H (50% Volume)
Headset Net Weight	About 180g
Charge Base Net Weight	N/A
Headset Dimension	210 x 170.5 x 75.5mm
Charge Base Dimension	N/A

Notes: *Actual use time will differ from environment and volume

8. Trouble Shooting

A. How to reconnect to your mobile after first powering off

When the headset connects with your mobile phone successfully the first time, it will search and reconnect to the paired device automatically when powered ON, If this fails, follow the instructions on page 3 and pair the headset to your device again.

B. How to Delete a paired device?

Turn the headset ON. Press the **Volume +** and the **Volume -** buttons together for 5 seconds to clear the paired device. The LED will flash Blue and Red once at the same time. This means the paired device has been deleted, and the headset will not connect back to the device. If you are having connection issues, try clearing the pairing record firstly and then pairing your device again

C. What is the password for pairing?

Some devices require password for pairing. Try the below options if your device requires a password.

0000 or **8888** or **1111** or **1234**

D. Which devices can charge the headset?

Any car charger, power bank, PC with a DC 5V Output and a charging current more than 500mA will be suitable

E. 3-Way Calling

If you receive an incoming call while already on a call, short press the MFB button to answer the new call and hang up the current call

To answer a new incoming call and keep the current call active
Double press the MFB button

To reject a new incoming call when you are on an active call.
Long press the MFB button for 1 second

When you are on a three-party call, double press the MFB button to switch audio between the current call and the other active call